


PRESTAZIONE ELETTROVENTILATORI - SERIE S
ELECTRICAL FANS PERFORMANCES - MODEL S

Tolleranza sulla portata ±5% - Capacity tolerance ±5% Tolleranza sulla rumorosità +3 dB(A) - Noise level tolerance +3 dB(A)					Portata d'aria - Air capacity (m ³ /h)																			
Ventilatore tipo Fan type	g/1' rpm	kW inst.	dB(A)	Pressione totale - Total pressure (mm H ₂ O)																				
	250	300	350	400	500	600	700	800	900	1000	1300	1600	1900	2200	2500	2800	3100	4000	5000	6000	7000	8000	9000	10000
S 72	-	-	-	-	95	97	97	99	102	105	108	110	105	-	-	-	-	-	-	-	-	-	-	-
S 82	-	-	-	-	-	-	-	-	-	151	155	162	170	175	180	178	-	-	-	-	-	-	-	-
S 92	-	-	-	-	-	-	-	-	-	-	187	190	200	212	218	226	224	-	-	-	-	-	-	-
S 74	-	-	-	-	22	23	23	24	25	24	22	-	-	-	-	-	-	-	-	-	-	-	-	-
S 84	-	-	-	-	-	-	-	39	40	41	41	43	43	42	42	41	-	-	-	-	-	-	-	-
S 94	-	-	-	-	-	-	-	-	-	45	50	55	59	60	59	58	57	-	-	-	-	-	-	-
S 104	-	-	-	-	-	-	-	-	-	-	-	58	62	69	71	74	75	73	-	-	-	-	-	-
S 114	-	-	-	-	-	-	-	-	-	-	-	-	82	85	87	88	90	93	95	-	-	-	-	-
S 124	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	112	115	122	128	130	-	-	-
S 144	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	142	153	158	165	173	182
S 76	10	10	11	12	13	13	12	11	10	9	-	-	-	-	-	-	-	-	-	-	-	-	-	-
S 86	-	-	-	-	17	18	18	19	20	20	19	18	17	-	-	-	-	-	-	-	-	-	-	-
S 96	-	-	-	-	-	-	-	21	22	23	24	24	23	21	19	-	-	-	-	-	-	-	-	-
S 106	-	-	-	-	-	-	-	-	-	-	25	27	29	29	28	27	25	23	-	-	-	-	-	-
S 116	-	-	-	-	-	-	-	-	-	-	-	-	33	36	37	38	39	38	37	-	-	-	-	-
S 126	-	-	-	-	-	-	-	-	-	-	-	-	-	-	50	50	52	55	58	56	-	-	-	-
S 146	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	62	65	69	72	76	74	-	-
S 156	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	86	90	95	98	100	103
S 108	-	-	-	-	-	12	12	13	14	15	14	13	12	11	-	-	-	-	-	-	-	-	-	-
S 118	-	-	-	-	-	-	-	-	-	16	17	19	18	18	17	16	15	-	-	-	-	-	-	-
S 128	-	-	-	-	-	-	-	-	-	-	-	-	-	28	29	30	31	32	30	-	-	-	-	-
S 148	-	-	-	-	-	-	-	-	-	-	-	-	-	-	37	38	39	42	45	46	47	-	-	-
S 158	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	42	46	50	53	55	56	58	-

Tolleranza sulla portata ±5% - Capacity tolerance ±5%
Tolleranza sulla rumorosità +3 dB(A) - Noise level tolerance +3 dB(A)

MODELLO S - DIMENSIONI DI INGOMBRO

MODEL S - OVERALL DIMENSIONS

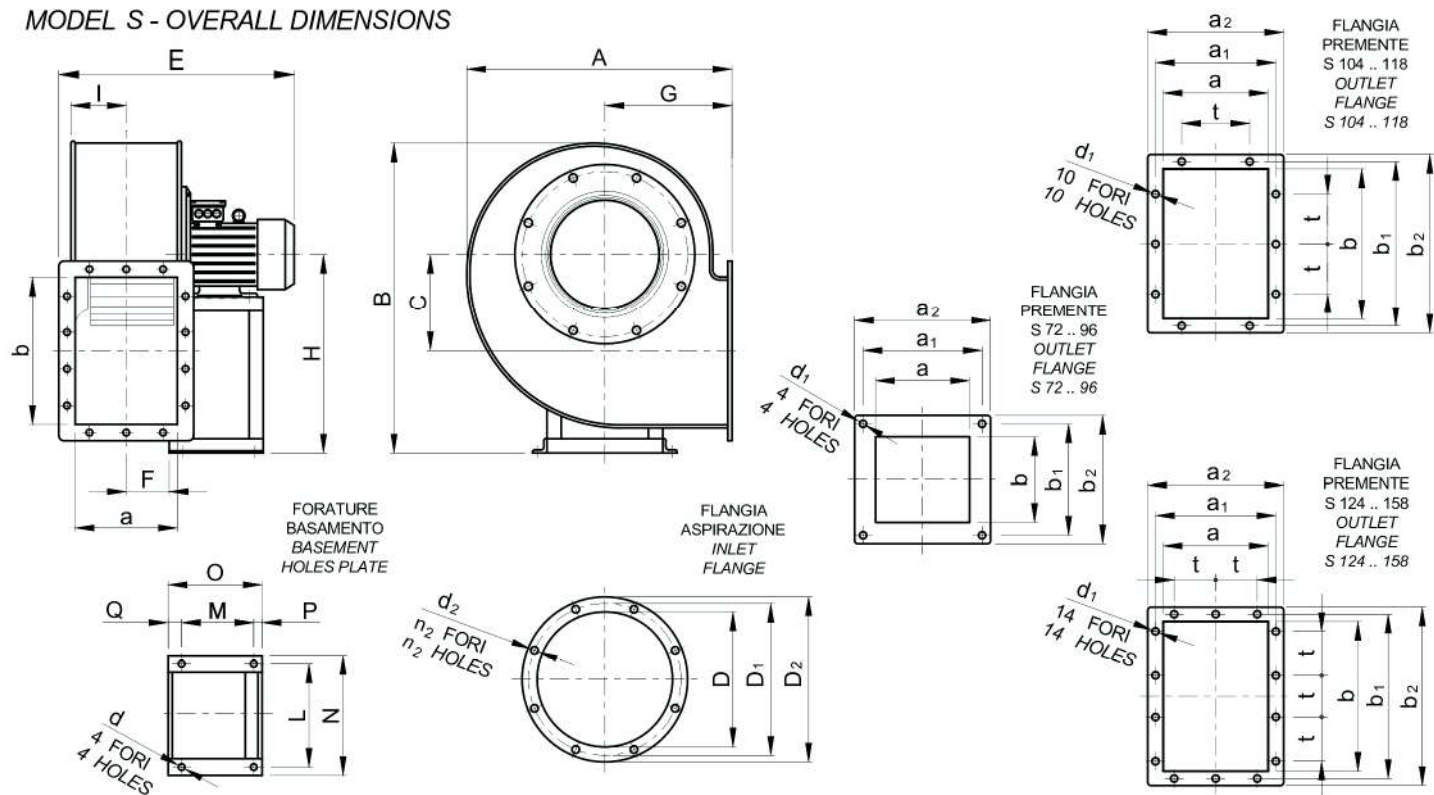

Ventilatore Tipo Fan Type	Motore Motor		Ventilatore Fan								Basamento Basement								Flangia aspirazione Inlet flange					Flangia premente Outlet flange										Peso Weigh kg
	g/1' rpm	kW inst.	A	B	C	E	F	G	H	I	L	M	N	O	P	Q	d	D	D ₁	D ₂	d ₂	n ₂	a	b	a ₁	b ₁	a ₂	b ₂	d ₁	n fori n holes	t			
S 72	2900	1.1	333	375	135	403	75	167	230	75	230	90	270	130	20	20	10	180	215	250	11.5	6	135	135	165	165	190	190	8.5	4	-	24		
S 74	1400	0.37	333	375	135	381	75	167	230	75	230	75	270	115	20	20	10	180	215	250	11.5	6	135	135	165	165	190	190	8.5	4	-	20		
S 76	960	0.17	333	375	135	381	75	167	230	75	230	75	270	115	20	20	10	180	215	250	11.5	6	135	135	165	165	190	190	8.5	4	-	20		
S 82	2900	2.2	427	505	165	469	82	200	310	82	245	137	270	215	18	60	10	235	269	305	11.5	8	156	192	186	223	210	245	9	4	-	45		
S 84	1400	0.55	427	505	165	404	82	200	310	82	215	125	235	190	15	50	10	235	269	305	11.5	8	156	192	186	223	210	245	9	4	-	36		
S 86	960	0.25	427	505	165	404	82	200	310	82	215	125	235	190	15	50	10	235	269	305	11.5	8	156	192	186	223	210	245	9	4	-	34		
S 92	2900	3	480	560	180	531	97	237	340	97	300	200	335	260	25	35	12	280	325	360	11.5	8	180	222	215	250	235	275	9	4	-	54		
S 94	1400	1.1	480	560	180	470	97	237	340	97	245	137	270	215	18	60	10	280	325	360	11.5	8	180	222	215	250	235	275	9	4	-	44		
S 96	960	0.37	480	560	180	470	97	237	340	97	245	137	270	215	18	60	10	280	325	360	11.5	8	180	222	215	250	235	275	9	4	-	39		
S 104	1400	1.5	550	675	196	551	120	243	420	116	245	137	270	215	18	60	10	321	366	401	11.5	8	224	315	273	366	304	395	11.5	10	125	56		
S 106	960	0.75	550	675	196	526	120	243	420	116	245	137	270	215	18	60	10	321	366	401	11.5	8	224	315	273	366	304	395	11.5	10	125	53		
S 108	700	0.37	550	675	196	526	120	243	420	116	245	137	270	215	18	60	10	321	366	401	11.5	8	224	315	273	366	304	395	11.5	10	125	51		
S 114	1400	2.2	610	740	225	614	133	265	450	130	300	200	335	260	25	35	12	360	405	440	11.5	8	250	355	300	405	330	435	11.5	10	125	78		
S 116	960	1.1	610	740	225	578	133	265	450	130	245	137	270	215	18	60	10	360	405	440	11.5	8	250	355	300	405	330	435	11.5	10	125	72		
S 118	700	0.55	610	740	225	578	133	265	450	130	245	137	270	215	18	60	10	360	405	440	11.5	8	250	355	300	405	330	435	11.5	10	125	70		
S 124	1400	4	690	825	250	652	145	300	500	145	300	200	335	260	25	35	12	405	448	485	11.5	8	280	400	332	448	360	480	11.5	14	125	90		
S 126	960	1.5	690	825	250	644	145	300	500	145	300	200	335	260	25	35	12	405	448	485	11.5	8	280	400	332	448	360	480	11.5	14	125	79		
S 128	700	0.75	690	825	250	644	145	300	500	145	300	200	335	260	25	35	12	405	448	485	11.5	8	280	400	332	448	360	480	11.5	14	125	79		
S 144	1400	5.5	765	925	280	724	162	335	560	162	360	250	392	320	25	45	12	455	497	535	11.5	12	315	450	366	497	395	530	11.5	14	125	102		
S 146	960	3	765	925	280	724	162	335	560	162	360	250	392	320	25	45	12	455	497	535	11.5	12	315	450	366	497	395	530	11.5	14	125	96		
S 148	700	1.5	765	925	280	688	162	335	560	162	300	200	335	260	25	35	12	455	497	535	11.5	12	315	450	366	497	395	530	11.5	14	125	80		
S 156	960	5.5	840	1030	315	804	182	355	630	182	360	250	392	320	25	45	12	505	551	585	11.5	12	355	500	405	551	435	580	11.5	14	125	145		
S 158	700	2.2	840	1030	315	764	182	355	630	182	360	250	392	320	25	45	12	505	551	585	11.5	12	355	500	405	551	435	580	11.5	14	125	133		